

How to assemble the shake machine

- 1) Gather all parts from cooler and get the lubricant from under the machine



- 2) Lubricate the small ring (Whenever using the lubricant use it liberally, its cheap and will help machine last longer and your job easier.)



3) Put the ring on end of the long paddle, place the two white pieces (flat side out) onto the paddle




4) Put the paddle in the machine the side with the flat part goes in first



5) Make sure you rotate and push back until it is fully inserted




6) Fill white cap with lube and lubricate outside if it. Place in black face plate paying attention to the notch and that it lines up.

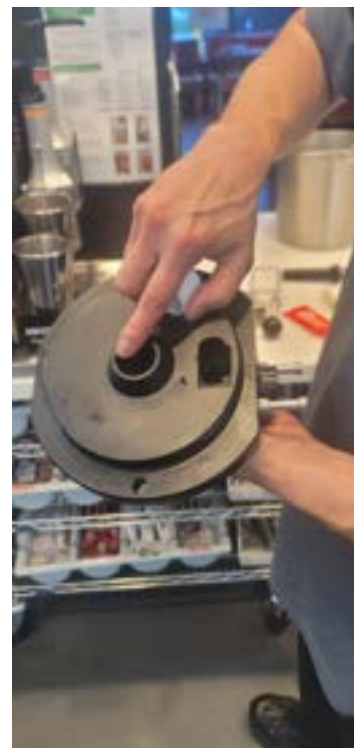

7) Reassemble handle/face plate



8) Spread lube around entire inner o-ring of face plate

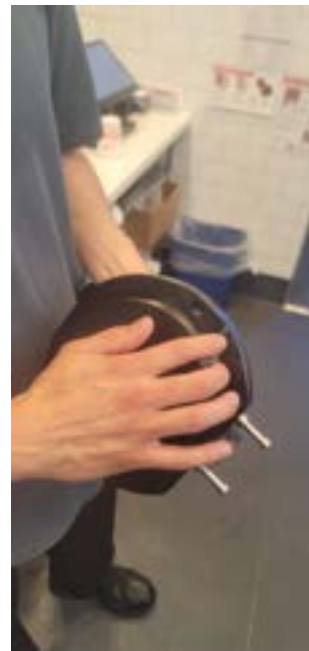

9)Place face plate onto shake machine lining up screws with holes



10)attach both screws one turn, once both are on then you can tighten them. Once they are tightened take paper towel and tighten more



11) Place “pin” back in machine making sure that it is on the white button.



12) Reattach spindle



13) Reattach white collar by twisting and then reattach hoses to it



14) Reattach safety collar



15) Place white stick into silver tube making sure that the holes are lined up. Then put into hole in hopper



16) Turn the machine to 'Auto' Your shake machine is now ready to use!